

Anchorage EhS 45° "Hercules" DW26.5

The powerful and quick reanchoring to support frames for single-sided formwork !
The new developed slim shaped anchor-head can be easily installed through close-meshed reinforcement and the sealed PVC duct tube prevents concrete foam penetrating. Also there is no contact of steel to the surface.

Benefits:

- Quick, simple and correct assembly:
- fastening at the upper meshes with the *Holder 45°*
- No coupling parts required
- Tie rods DW26.5 reusable
- Short and slim shaped, light weight
- minimises refinishing
- Version for ready grinded surface in range



"Hercules" EsB with *Holder 45°*

perm. load P 45° / concrete pressure property :
275 kN / 18 N/mm² - 290 kN / 20 N/mm² - 325 kN / 25 N/mm²

IFBT GmbH

tensile tests in 45°-angularity

Anchorage EhS 45° "Hercules" DW26.5/EsB total length 60 cm
installation in slabs with **subsequent screed coating**
thickness greater than 40 cm

- type with sealed fitted PVC duct tube and sealing cap, supplied ready for installation -

Art.-No. 502651 1,100 kg € 26,48

Installation with **Holder 45°** - Art.-No. 502661, lost part
or with **Adjusting-Gadget 45°**, Art.-No. 515201, reusable → see special page


Anchorage EhS 45° "Hercules" DW26.5/GIB total length 50 cm
installation in slabs with **ready grinded surface**
thickness greater than 40 cm

- type with *Recess "PE-45°"* and *indicating pointer* -

The area can be easily planed over and recognized again. The Recess leaves a suitable large space for any filling compound.

Art.-No. 502652 1,100 kg € 27,78

Installation with **Holder 45°** - Art.-No. 502661 - exclusively

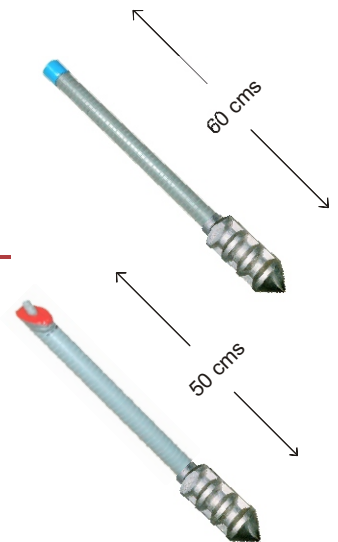


Holder 45°

for installing anchorage in 45°angularity to wall formwork

Sturdy mounting with broad bearing.

Clamp in PVC duct tube and tight wing nut.

Art.-No. 502661 0,400 kg € 4,65



Stop Plug

for sealing the PVC duct tube respectively trapping filling compound.

Art.-No. 502670 0,600 kg € 0,17 PU 100 pcs.



Prices per piece, ex warehouse, add.VAT